


# Z-LASER

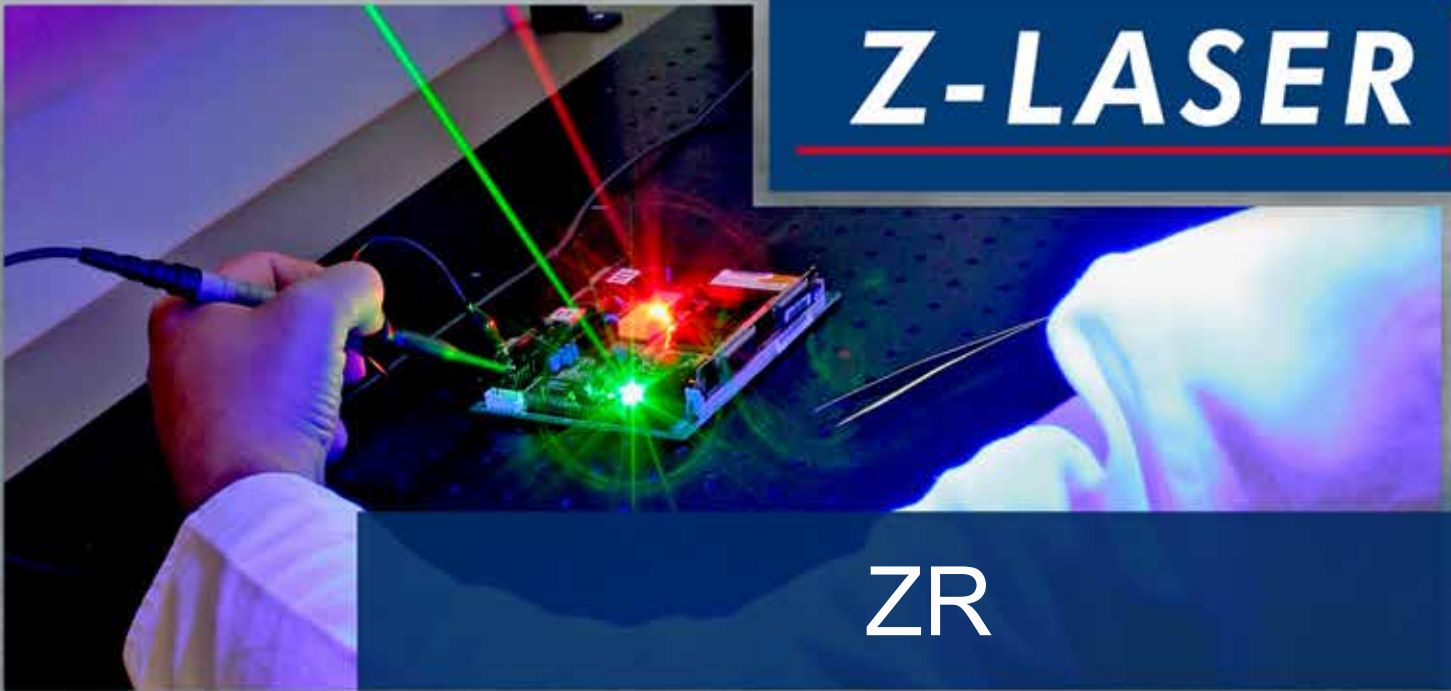

## ZR

- » Asymmetric line optics for maximum line length
- » Optical output power up to 40mW, red
- » Integrated wide power voltage range with high noise immunity
- » Dimensions: Ø 40mm x 201mm

Wood

Stone

Textile

Metal



# ZR



## Mechanical specifications

Dimensions	201mm x Ø 40mm
Housing	Aluminium, powder coated Optic head: Anodised black aluminium
IP rating	IP65
Electrical isolation	Potential-free housing
Connection	Mains plug

## Electrical specifications

Supply voltage	90 to 265VAC
Operation mode	APC with current limiting
Modulation	No
Protection	Integrated power supply with high noise immunity overvoltage category III Burst & Surge resistance Level 4

## Optical specifications

Wavelength	635nm
Output power	Up to 40mW
Adjustable focus	No
Available optics	Line Gaussian

## Environmental conditions


Case temperature	-10°C to +40°C
------------------	----------------

CE CE-Conformity according to the directives 2004/108/EC and 73/23/ECC excluding connection type.

### Accessories




### Gaussian profile



### Optics

Line



### Order code

Z X R - 635 - X

Power | Wavelength | Optic  
Product family name

